



## MODWRIGHT INSTRUMENTS KWA 150 POWER AMP

[WWW.MODWRIGHT.COM](http://WWW.MODWRIGHT.COM)

---




The KWA 150 provides the strengths of both Tube and Solid State products: 3-D sound-staging, holographic imaging and beautiful midrange of tubes, combined with sparkling highs, low distortion, bass resolution and control of solid state.

The heart of the KWA 150 amplifier is a single voltage gain stage called the 'Solid State Music Stage'. The circuit was developed by Alan Kimmel, creator of the exceptional vacuum tube 'Mu' stage.

Features include: high-low bias switch, stereo/bridge-mono switch and true balanced floating inputs, accepting balanced and unbalanced inputs. The design incorporates a regulated power supply for the input stage, Cardas' best connectors and oversized heat-sinks. The first watts operate in pure Class A.

The KWA 150 uses no global feedback, is direct-coupled, fully differential, dual-mono, bridgeable and designed and built in the U.S.A.

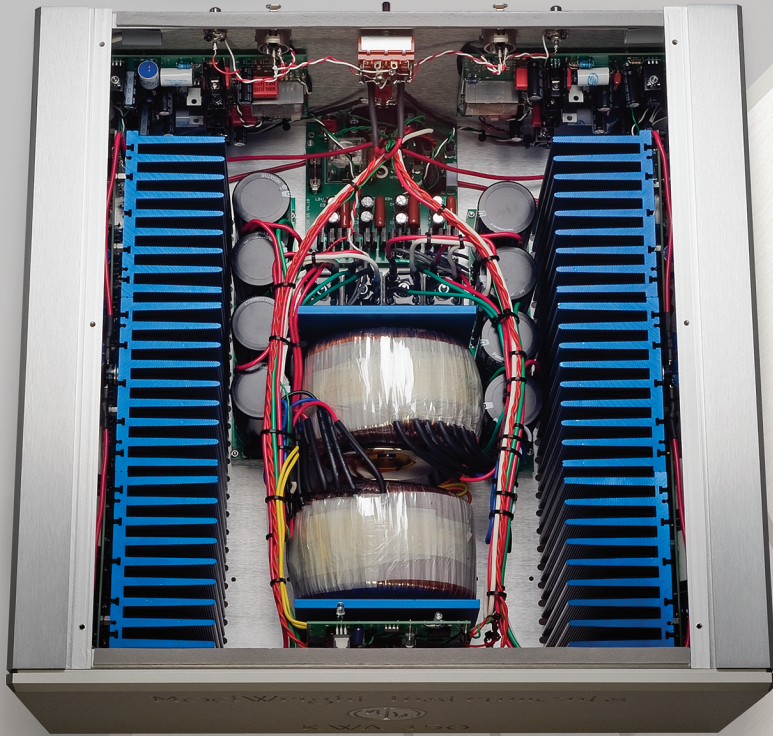

# MODWRIGHT INSTRUMENTS KWA 150 POWER AMP

[WWW.MODWRIGHT.COM](http://WWW.MODWRIGHT.COM)



## Power Ratings:

150W @ 8 ohms (Stereo) @ .06% THD    450W @ 8 ohms (Bridge Mono) @ .06% THD  
250W @ 4 ohms (Stereo) @ .06% THD    650W @ 4 ohms (Bridge Mono) @ .06% THD

Bandwidth: 10Hz - 100Khz (+0, -1dB)

Noise Floor: -100dB

Channel Separation: -75dB below 20Khz

Gain: 26dB

Input Impedance: Min. 15K at 50Hz; 23K at 1Khz

Dimensions: 17"W x 17"D x 8.5"H

Shipped Weight: 84lb

**ModWright Instruments Inc.**

[www.modwright.com](http://www.modwright.com)  
[modwright@yahoo.com](mailto:modwright@yahoo.com)  
(360)247-6688